

FIG.1

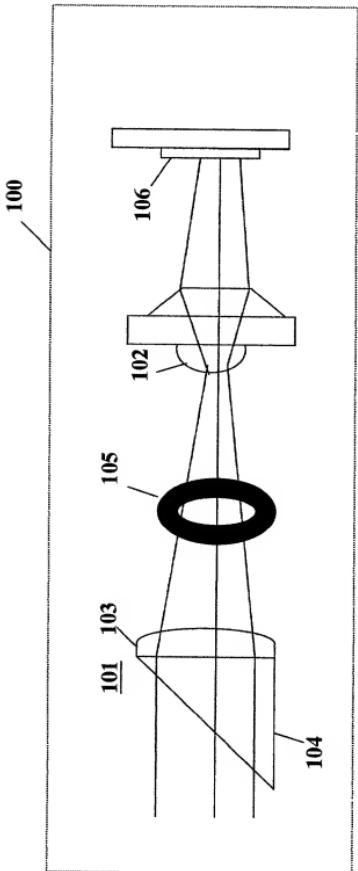


FIG.2




FIG.3

401

Install two pairs of LED 300 at the triangular prism 104 side of the special optical component 101, wherein the special optical component 101 consists of the first lens 103 and the triangular prism 104.

402

Install the detector 106 such as CMOS sensor 106 at the first lens 103 side of the special optical component 101.

403

Install the second lens 102 between the special optical component 101 and the detector 106.

404

Install the aperture 105 between the special optical component 101 and the second lens 102.

FIG.4